

TIMBEREX[®]

wood finishing oil



The Finest Natural Protection



The Timberex® brand has been recognised in over 40 countries worldwide for quality and competence in the field of wood finishing oils since 1927.

Index

Oils for interior use

TIMBEREX® Natural	P 06
TIMBEREX® Coloured	P 07
TIMBEREX® Heavy Duty UV Plus	P 08
TIMBEREX® Hard Wax Oil	P 09
TIMBEREX® Wax-Oil	P 10

Oils for exterior use

TIMBEREX® Timberguard®	P 12
------------------------	------

Maintenance products

TIMBEREX® Satin Oil	P 14
TIMBEREX® Bio-C	P 16
TIMBEREX® Oil & Wax Remover	P 17

TIMBEREX® is ISO9001 and EN71 certified and produces environmentally friendly and durable oils from natural renewable resources and in accordance with the latest international specifications. TIMBEREX® is a part of the Rust-Oleum Europe Group.


a **RUST-OLEUM®** brand

Our experienced sales and technical teams will be pleased to advise you in the use of our products, so please do not hesitate to contact us. Tel.: +32(0)13 460 200.

The philosophy of using TIMBEREX® oils

Oiling provides a deep penetrating, long term and cost effective finish for all timber floors and wooden surfaces. Oiling is suitable in busy commercial areas as well as being ideal for domestic situations.

Fast curing, water and wear-resistant, the deep penetrating oils protect wood from within and are superior to thin surface coatings. Refurbishment is easily completed without sanding by simple application of refurbishing oils in conjunction with light buffing. We provide a full range of industrial oils, contractor and DIY tailored finishes, and cleaning and maintenance products.

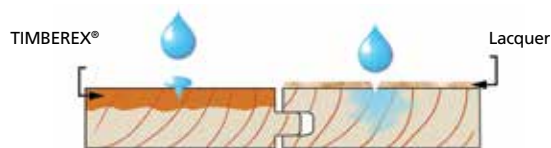

Oils produce a long-term deep protection to wood from spillage, even after surface damage

The Timberex® advantage

What makes TIMBEREX® different from other manufacturers of wood oils?

1. We don't use water or fillers in our oils, this improves drying time, product quality and increases the coverage rate.
2. Our high-quality products require a minimum of maintenance.
3. Very low VOC in our products, some are even VOC-free.
4. Our products are food- and toy-safe (EN 71-3 certified).

TIMBEREX® & the Environment


We, the manufacturers, have the responsibility to ensure the health and safety of the people using our products as well as looking after the environment. Something we at TIMBEREX® take very seriously.

All of our oils are made from natural, renewable oils and waxes. This reduces the environmental impact.

Also, we keep our VOC levels very low, reducing harmful emissions.

Several independent test agencies have certified our products, including Eurofins (Grenelle), Byggarubedömningen (Environmental impact) and Bureau Veritas (Food- and Toy-Safe).

TIMBEREX® Emission result according to French law:

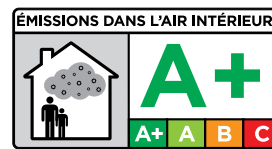

* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions) ».



TIMBEREX®

wood finishing oil

Product selector

		COVERAGE	DOMESTIC	HEAVY TRAFFIC	FAST DRYING	COLOURING	SOLVENT-FREE	PAGE
INTERIOR	TIMBEREX® NATURAL	5-7 m²/l	•		•			6
	TIMBEREX® COLOURED	6-10 m²/l	•	•	•	•		7
	TIMBEREX® HEAVY DUTY UV PLUS	12-15 m²/l	•	•	•			8
	TIMBEREX® HARD WAX OIL	15-20 m²/l	•	•	•			9
	TIMBEREX® WAX-OIL	15-20 m²/l	•	•	•		•	10
EXTERIOR	TIMBERGUARD® NATURAL	6-10 m²/l	•	•				12
	TIMBERGUARD® COLOURED	6-10 m²/l	•	•		•		12
MAINTENANCE	TIMBEREX® SATIN OIL	15-20 m²/l	•	•				14
	TIMBEREX® BIO-C		•	•			•	16
	TIMBEREX® OIL&WAX REMOVER	7-10 m²/l	•	•	•			17

Logo explanation

In this brochure, you will find the following symbols. This what they mean:



Food & Toy Safe:

The product is safe to use in food areas, like kitchen tabletops, kitchen floors. Approved EN71-3 by Bureau Veritas.



R9 / R10-logo:

This product has been tested for anti-slip properties.



AQUA-WB-logo:

This product is waterbased, and is also VOC-free. No risk of combustion of application tools, like cloths.



Interior



TIMBEREX® Natural

A traditional oil for domestic use

TIMBEREX® Natural has been extensively used on wooden floors in thousands of homes throughout the world since 1927 and is also excellent on furniture, panelling etc. TIMBEREX® Natural is designed to penetrate deeply into the wood.

- Made from natural, fast drying oils
- Cured and buffed surface has a lustrous sheen with an easily cleaned silk finish
- Colour is enriched and grain patterns are highlighted on the smooth, easily maintained surface

Availability
1 & 5 litre

Coverage
5-7 m² per litre

Applicators
Squeegee, roller or brush

Nylon pads
Red or brown (3M or similar)

Cleaner
TIMBEREX® Bio-C

Maintenance
TIMBEREX® Satin Oil



TIMBEREX® Coloured

Pigmented oil in 8 different colours for decoration and protection

Pigmented version of TIMBEREX® Natural. Eight attractive colours are available, each one enriching and enhancing the wood.

- Cured and buffed surface has a highly wear and water-resistant finish
- Colours can be mixed together for a wide range of effects
- Made from natural, fast drying oils and resins

Availability
1 & 5 litre

Coverage
6-10 m² per litre

Applicators
Squeegee, roller or brush

Nylon pads
Red (3M or similar)

Cleaner
TIMBEREX® Bio-C

Maintenance
TIMBEREX® Satin Oil



TIMBEREX® Heavy Duty UV Plus

Hard wearing oils for commercial and industrial use

TIMBEREX® Heavy-Duty UV PLUS is an improved version of the TIMBEREX® Heavy-Duty UV wood oil, with improved coverage, less odour, water resistance, UV resistance and faster curing. Heavy-Duty UV PLUS uses natural, fast drying oils and resins which penetrate deeply into the wood.

- Seals and protects wood from within
- For high traffic areas as airports, museums, conference centres and more
- UV-blockers prevent discoloration
- Protects the wood against liquids and stains
- Protects without losing the 'natural wood look'

Availability
1 & 5 litre

Coverage
12-15 m² per litre

Applicators
Squeegee, roller or platform pad

Nylon pads
Red or brown (3M or similar)

Cleaner
TIMBEREX® Bio-C

Maintenance
TIMBEREX® Satin Oil



TIMBEREX® Hard Wax Oil

Quick drying durable protection for any wood surface

This oil is offered in SATIN and MATT finish and can be used on floors, worktops surfaces and furniture. The products is easy-to-apply with no special tools required and will dry within hours and be ready for use within a few hours. TIMBEREX® Hard-Wax Oil and can be used for maintenance, repairs and renovation.

- Very durable, for medium & high traffic areas
- Resistant to liquid spills
- Rapid curing
- High coverage per litre
- Easy application without any special tools

Availability
1 & 5 litre

Coverage
15-20 m² per liter (Priming),
> 50 m² per liter (maintenance)

Applicators
Brush, roller or platform pad

Nylon pads
White (3M or similar)

Cleaner
TIMBEREX® Bio-C

Maintenance
TIMBEREX® Hard Wax Oil



TIMBEREX® Wax-Oil

A low solvent oil containing high-grade Carnauba wax, which greatly enhances colours and grain and allows wood to age naturally into rich varying tones.

- Suitable for all common wood types intended for both commercial and domestic situations.
- Fast curing: application, wet- and dry-buffing on the same day
- Good coverage per litre
- Cures to a deep satin finish
- Easy to apply without any special tools

Availability

1 & 5 litre

Coverage

15-20 m² per liter (Priming),
> 50 m² per liter (maintenance)

Applicators

Rubber squeegee

Nylon pads

Red or brown (3M or similar)

Cleaner

TIMBEREX® Bio-C

Maintenance

TIMBEREX® Wax-Oil

TIMBEREX®

wood finishing oil



Exterior



TIMBEREX® Timberguard®

A natural protective oil for exterior use

TIMBERGUARD® is designed for the treatment and care of exterior wooden furniture, doors, decking, windows etc. Timberguard is being offered in Clear, Teak and Bangkirai.

- For all wood species
- Contains UV-filters to protect wood from ageing
- Deep-penetrating, hardening natural oil
- Easy to apply by roller, brush or cloth

Availability
1 & 5 litre

Coverage
6-10 m² per litre

Applicators
Roller or brush

Nylon pads
Red or brown (3M or similar)

Cleaner
TIMBEREX® Bio-C

Maintenance
TIMBERGUARD®

TIMBEREX®

wood finishing oil



Maintenance



TIMBEREX® Satin Oil

Maintenance oil for oil treated surfaces

TIMBEREX® Satin Oil is used for periodic maintenance of floors treated with natural drying oils.

- Labour-efficient, easy and rapid maintenance
- Surface dry after 3-6 hours
- Re-sanding normally not necessary
- One layer is sufficient

Availability
1 & 5 litre

Coverage
15-20 m² per litre

Applicators
Rubber squeegee

Nylon pads
Red or brown (3M or similar)

Cleaner
TIMBEREX® Bio-C

Maintenance Oil for
TIMBEREX® Natural/Coloured
TIMBEREX® Heavy Duty UV Plus



TIMBEREX® Bio-C

pH7 neutral cleaner for oiled surfaces

TIMBEREX® Bio-C is a gentle cleaning agent that has been specially formulated for use on oiled timber floors.

- Neutral (pH7)
- Non-foaming
- Low viscosity, disperses easily in cold water
- Biodegradable and non-hazardous
- Does not contain perfumes or colouring agents
- Solvent-free
- Very low odour

Availability
1 & 5 litre

Light cleaning
Mix 100ml of Bio-C with
5 litres of water

Heavy cleaning
Mix 250ml of Bio-C with
5 litres of water



Application guide for TIMBEREX® Oils

The following is a general and basic guide to preparation and application. Please refer to the comprehensive instructions on products datasheets and containers. If the surface is varnished, lacquered or otherwise sealed, sanding will have to take place before applying oil. If in doubt, contact your local floor contractor for assistance.

Sanding

Initial: use a coarse 40-60 grade sandpaper. Sand the edges with an edge sander using one grade only. If the floor is old and/or uneven, or treated with an acid cured lacquer, varnish or paint, the initial sanding may require a coarser grade than 40.

Intermediate: use a sandpaper 20 grades higher than for initial stage.

Final: use 100-120 grade sandpaper (grade 100 for colored). Vacuum the floor carefully. Wipe the entire surface using a very well wrung-out damp cloth, and allow to dry.



Testing

Test a small unobtrusive area first if possible (especially on merbau, oil rich exotic hardwoods and parquet pre-oiled by the manufacturer) and allow to cure to ensure that the desired result is achieved.

Application

Apply TIMBEREX® oil evenly to the bare, sanded wood with a paint pad, brush, roller or rubber squeegee, depending on which oil is being used. It is important that the area is not flooded with the oil.

Re-apply as necessary (min. 2 coats) at 15-45 minute intervals. The surface must be kept wet with the TIMBEREX® oil during the whole application period to ensure complete impregnation of the fibres.

Allow the final application to penetrate for 30-45 minutes maximum and then buff with a polishing machine (at 150 rpm) with a red or blue grade nylon pad (3M or similar). Do not allow the surface to start to cure and become sticky.

After the application it is important to remove ALL excess, unabsorbed oil with cotton cloths. See disposal information (below).

After 1-12 hours (depending on product), dry buff the surface with a Red nylon pad (3M or similar) to produce a low, satin sheen. A higher sheen is possible by further buffing with a soft, dry cloth. Any areas which appear matt may be buffed again with a small amount of the product added to the centre of the buffing cloth.

Dry buffing may again be necessary.

The surface will normally be sufficiently dry to walk on after 12-24 hours and will gradually harden and become water-resistant after approximately 5-10 days.

If required the surface may be covered with permeable protective paper 48 hours after final dry buffing.

Maintenance of TIMBEREX® treated floors

Scheduled cleaning/maintenance is essential for the floor. These instructions are the same for domestic or heavy commercial use. The only variation is the frequency.


- Sweep or vacuum the surface on a regular basis.
- Remove spillages with a well wrung-out cloth using a neutral cleaner, such as TIMBEREX® Bio-C.
- Clean the floor with a cloth dampened with diluted TIMBEREX® Bio-C or similar. Do not over-wet the floor. Cleaned surfaces should dry in no more than a couple of minutes. Amount of cleaner: Light cleaning, 100ml of Bio-C per 5 litres of water. Heavy cleaning, 250ml per 5 litres of water.
- Dry buff the floor with a buffing machine with a Red Grade 3M or equivalent pad (for commercial use). The use of high-quality mats inside and outside entrances will greatly reduce the dirt on the floor and make cleaning the floor easier and quicker.
- It is recommended to re-oil once a year or when needed.

Watch our application

 [YouTube /timberexoil](https://www.youtube.com/timberexoil)

SAFETY

In common with all natural oil curing products, under certain conditions applicators, cloths etc impregnated with the product can spontaneously combust. To prevent the possibility of spontaneous combustion, applicators, cloths etc should be placed immediately into a container filled with water and placed outside the building. Disposal of the contents should be in accordance with local regulations.

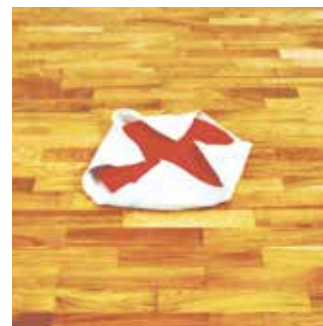

www.timberex.com

a **RUST-OLEUM**® brand

RUST-OLEUM EUROPE / NV MARTIN MATHYS SA

Kolenbergstraat 23 - 3545 Zelem - Belgium

T: +32 (0)13 460 200 - F: +32 (0)13 460 201

info@rust-oleum.eu - www.rust-oleum.eu



Your Distributor: