


# TIMBEREX

WOOD FINISHING OIL

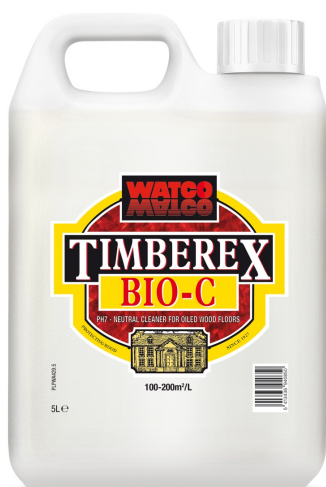

## **TIMBEREX® BIO-C**

### **pH 7 neutral cleaner for oiled surfaces**

- Neutral (pH7)
- Non-foaming
- Low viscosity, disperses easily in cold water
- Biodegradable and non-hazardous
- Does not contain perfumes or colouring agents

# TIMBEREX® BIO-C

## DESCRIPTION

Timberex Bio-C is a gentle cleaning agent that has been specially formulated for use on oiled timber floors.

## RECOMMENDED USE

TIMBEREX® Bio-C is a gentle cleaning agent that has been specially formulated for use on oiled timber floors.

## THEORETICAL CONSUMPTION

Light cleaning: Mix 100 ml of BIO-C with 5 litres of water. 1 litre of BIO-C can be used to create 50L of mixture to clean 200 m².

Heavy cleaning: Mix 250 ml of BIO-C with 5 litres of water. 1 litre of BIO-C can be used to create 20L of mixture to clean 80 m².

## DIRECTIONS FOR USE

Apply the mixed solution sparingly with a damp mop, cloth or foam pad. The mixed solution may also be applied by trigger operated hand spray. Wipe the surface with a clean, slightly damp cloth and leave to dry.

**MAINTENANCE ADVICE:** Timberex Bio-C must be diluted correctly. Complete a small test area first. Damage may occur to timber floors subjected to excessive moisture/water. Good quality mats inside and outside of entrances will assist in reducing the effects of dirt and damp.

## SHELF LIFE

Minimum of 3 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5 and 35°C.

Date issued: 24/03/2025

**Available colours & pack sizes:** Please refer to the respective product page on [www.rust-oleum.eu](http://www.rust-oleum.eu) for an overview of actual available colours and pack sizes.

**Disclaimer:** The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the users responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from [www.rust-oleum.eu](http://www.rust-oleum.eu) or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its' products without prior notification.

**Rust-Oleum Netherlands B.V.**  
Zilverenberg 16  
5234 GM 's-Hertogenbosch  
The Netherlands  
T : +31 (0) 165 593 636  
F : +31 (0) 165 593 600  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**Tor Coatings Ltd (Rust-Oleum Industrial)**  
Shadon Way, Portobello Ind. Estate  
Birtley, Chester-le-Street  
DH3 2RE United Kingdom  
T : +44 (0)1914 113 146  
F : +44 (0)1914 113 147  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**Rust-Oleum France S.A.S.**  
38, av. du Gros Chêne  
95322 Herblay  
France  
T : +33(0) 130 40 00 44  
F : +33(0) 130 40 99 80  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)

**N.V. Martin Mathys S.A.**  
Kolenbergstraat 23  
3545 Zelem  
Belgium  
T : +32 (0) 13 460 200  
F : +32 (0) 13 460 201  
[info@rust-oleum.eu](mailto:info@rust-oleum.eu)