


TIMBEREX

WOOD FINISHING OIL

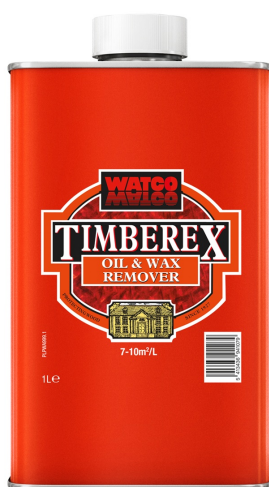

TIMBEREX® OIL & WAX REMOVER

The alternative to sanding

- Safe, easy application
- Dries in minutes
- Removes accidental splashes on other surfaces or tools

TIMBEREX® OIL & WAX REMOVER

DESCRIPTION

TIMBEREX® Oil & Wax Remover provides an alternative solution to sanding by, chemically removing all residue oil and wax from wooden surfaces without damaging them. Product strength is easily adjusted to suit each project by adding more or less water.

RECOMMENDED USE

Alternative to sanding by chemically removing any oil or wax residues on a wooden surface without damaging the wood.

DRY TIMES BY 20° C/RH 50%

Dry to recoat: 12 heures
Fully cured: /

THEORETICAL CONSUMPTION

7 - 10 m² per litre of ready-mixed solution

PRACTICAL CONSUMPTION

Note that the concentration of product varies depending on removal needs. By simply adding more or less water to the TIMBEREX Oil & Wax Remover, the strength of the product can be adjusted to fit the project at hand.

SURFACE PREPARATION

Clean the surface by vacuuming and damp wipe the entire floor using a very well wrung-out cloth, and allow to dry.

DIRECTIONS FOR USE

It is advisable to test a small area first to ensure that the desired result is achieved. The product can be mixed with up to 50% cold water although the more oil or wax that has to be removed, the less water is needed. Any diluted mixture should not be stand for more than 1 hour before application.

1. Apply the concentrated or diluted liquid with a cloth or mop. Leave for 5-10 minutes.
2. Buff the surface carefully using a brown (coarse) nylon pad to remove the oil or wax residue.
3. Rinse the surface carefully twice with clear water and TIMBEREX® Bio-C Cleaner. Wipe dry with a cloth.

In extreme situations, it might be necessary to repeat steps 1-3 for the desired effect. When the treatment has finished, we recommend to leave the surface to dry overnight. As soon as the surface is dry, it can be treated with a new layer of oil or wax for renewed protection.

SAFETY DATA

VOC readymix:	Not applicable.
Remarks regarding safety:	All product labels provide general safety information. Material safety data sheets are available on www.timberex.com . Food products must be removed from the area during application and cure. Applicators, cloths etc impregnated with the product should be put in a bucket of water and placed outside the building to avoid the possibility of spontaneous combustion. The contents should be disposed of according to local regulations.

SHELF LIFE

Minimum of 3 years from date of production in unopened cans, if stored in dry, well ventilated areas, not in direct sunlight at temperatures between 5 and 35°C.

Date issued: 24/03/2025

Available colours & pack sizes: Please refer to the respective product page on www.rust-oleum.eu for an overview of actual available colours and pack sizes.

Disclaimer: The information contained herein is to the best of our knowledge true and accurate and is given in good faith but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Rust-Oleum Europe be liable for consequential or incidental damages. Products must be stored, handled, and applied under conditions complying with Rust-Oleum Europe recommendations detailed within the latest copy of the product data sheet. It is the users responsibility to ensure that they have the current copy. Latest copies of the product data sheet is available for free and downloadable from www.rust-oleum.eu or upon a request to our Customer Services department. Rust-Oleum Europe reserves the right to change the properties of its' products without prior notification.

Rust-Oleum Netherlands B.V.
Zilverenberg 16
5234 GM 's-Hertogenbosch
The Netherlands
T : +31 (0) 165 593 636
F : +31 (0) 165 593 600
info@rust-oleum.eu

Tor Coatings Ltd (Rust-Oleum Industrial)
Shadon Way, Portobello Ind. Estate
Birtley, Chester-le-Street
DH3 2RE United Kingdom
T : +44 (0)1914 113 146
F : +44 (0)1914 113 147
info@rust-oleum.eu

Rust-Oleum France S.A.S.
38, av. du Gros Chêne
95322 Herblay
France
T : +33(0) 130 40 00 44
F : +33(0) 130 40 99 80
info@rust-oleum.eu

N.V. Martin Mathys S.A.
Kolenbergstraat 23
3545 Zelem
Belgium
T : +32 (0) 13 460 200
F : +32 (0) 13 460 201
info@rust-oleum.eu